


Glidden® ULTRA INTERIOR LATEX PRIMER 36600

Water based product

Technical Data Sheet

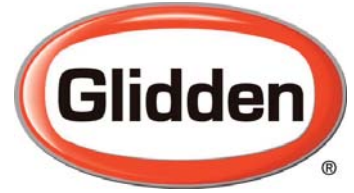

Technical Specifications (21°C (70°F))

Solids by Volume:	29% (± 1%)
Solids by Weight:	47% (± 1%)

Volatile Organic Compounds (VOCs)*

According to ASTM D3960-05:	< 100 g/L
Canadian regulation:	< 200 g/L

Available Colour

36600	White
-------	-------

Gloss Level Not applicable (primer)

- Gloss @ 60°: Not applicable
- Sheen @ 85°: Not applicable

Practical Coverage

35 - 39 sq. metres (380 - 420 sq. ft.) per 3.78 litres
9 - 10 sq. metres per litre

Coverage figures do not include loss due to surface irregularities and porosity or material losses due to application method or mixing.

Resin Type

- Vinyl Acrylic

Viscosity* Ready to use (97 - 105 Krebs Units)

Manufacturing specification, working viscosity may vary

Flammability	Non Flammable
Flash Point*	Not applicable

Film Thickness requirements*

• Wet:	97 to 107 µm 3.8 to 4.2 mils
• Dry:	29 to 32 µm 1.1 to 1.3 mil

Drying Time* @ 77°F/25°C - 50% Relative Humidity

Touch dry:	30 minutes
To recoat:	2 hours
Full curing:	14 days

When relative humidity is higher than 50%, double the required time.
Drying times listed may vary depending on temperature, humidity, film build, colour, and air movement.

*Technical Data Source: 36600

Product Description

Glidden Ultra 36600 is a high hiding, fast drying latex sealer, designed for use where additional sealing/filling properties are required.

Advantages

- Easy sanding
- High Hiding
- Good holdout
- Easy application

Intended Uses

- New and maintenance work.
- Residential and Commercial sites.
- Walls and ceilings of any room.

Surfaces

- New surfaces in good condition and properly prepared: drywall boards (conventional, water repellent or fire retardant), hardened and dry drywall compound, new dry plaster, wood, concrete, brick, stucco or other masonries.
- Surfaces in good condition previously painted with a water based product and properly prepared.

Limitations Of Use

- Must be coated with a topcoat.
- Not formulated to be used on floors.
- Not formulated to be used over aged alkyd finishes.

Certifications

- MPI #50 Primer-Sealer, Latex, Interior

PPG Architectural Coatings Canada, Inc. warrants performance of its products to its intended use if properly applied in accordance with the label directions and the specifications of the technical data sheet. Having no control over the application methods and conditions or the circumstances related to its use, no other warranty, expressed or implied, statutory or otherwise is given. This limited warranty extends only to the original purchaser of the product and is not transferable or assignable. If the product fails to conform to this limited warranty, we will, at your option, furnish replacement product or refund the purchase price. This limited warranty excludes (1) labour or costs of labour for the application or removal of any product and (2) all other direct, indirect, incidental, special or consequential damages.



Available at Dulux Paints Stores across Canada and Bétonel-Dulux Stores in Quebec

09/2017

SURFACE PREPARATION

Surfaces must be clean and dry. Remove loose and peeling paint, dirt, dust, mildew oil, wax, chalk, efflorescence, rust and other surface contamination.

Concrete and masonry: New surfaces must age at least 30 days, be thoroughly dry and free of any efflorescence salts.

Bare surfaces: Sand the grout surface and regularly remove the residue. Avoid sanding the bare gypsum.

Painted surfaces: Remove loose and peeling paint, chalk, and efflorescence by wire brushing, scraping, sanding, and/or pressure washing. Sand to smooth edges.

Eliminate stains caused by mildew with a solution of household bleach (1 part household bleach to 3 parts of water). Wear rubber gloves and eye protection. Rinse thoroughly with clear water and let dry completely.

Remove all surface contaminants by washing with an appropriate cleaner. Rinse thoroughly with water and allow to dry.

Sand rough areas and dull glossy surfaces or alkyd painted surfaces to ensure adhesion. Clean up carefully sanding residue.

Wood: unpainted wood or wood in poor condition should be sanded smooth and clean up carefully to remove dust. If wood exudes resin, scrape the excess and clean surface with alcohol or paint thinner prior to seal knots and sap streaks with shellac. Some wood types prone to stains may require two coats of primer.

PRECAUTION: Dry sanding will give rise to dust and/or hazardous fumes. Wear suitable respiratory protective equipment. **WARNING!** If you scrape, sand, or remove old paint, you may release lead dust. **LEAD IS TOXIC.** Contact a regional Health Canada office for more information.

Application

This is a ready-to-use product, do not thin.

Shake well before and frequently during use.

Keep containers closed when not in use.

Apply using brushes, rollers or airless spray equipment.

Application Conditions

Apply with good ventilation only when air and surface temperatures are between 10°C (50°F) and 32°C (90°F).

Tools

- Brush: synthetic bristles (nylon, polyester)
- Roller: Lint free – 10 mm
- Spray (Airless equipment)*: tip size: 0.015 to 0.021 in.
Pressure: 1500 – 2000 psi

*Spray recommendations may vary from figures listed depending on equipment manufacturer.

Spray equipment must be handled with due care and in accordance with the manufacturer's recommendation. High-pressure injection of coatings into the skin by airless equipment may cause serious injury.

SYSTEM RECOMMENDATIONS

All recommended surfaces:

- *Glidden Ultra* Interior Latex Sealer 36600– one coat to total surface.
- Appropriate *Glidden* or *Dulux* topcoat – 2 coats for better durability and appearance.

Cleanup

Remove as much product quantity as possible and clean hands and tools immediately with warm, soapy water. Clean spills right away with a damp cloth.

Storage and Transportation

Keep product cool and dry. **DO NOT FREEZE**

Disposal

Consult your municipality in order to dispose of paint residues according to environmental regulations. Do not pour down a drain or storm sewer.

Safety Measures

Before use, be sure to read and follow the instructions and warnings on the label and Safety Data Sheet (SDS). For workplace use, an SDS are available from your retailer, through our website or by calling 1-800-463-7426. Keep out of the reach of children. Use only in well-ventilated area. Keep containers tightly closed and sealed until ready for use. Use personal protective equipment as required. Avoid contact with eyes or skin. Avoid breathing spray mists.

MAY BE HARMFUL IF SWALLOWED. MAY CAUSE EYE AND SKIN IRRITATION.

FIRST AID TREATMENT: If swallowed, call a Poison Control Centre or doctor immediately. If in eyes or on skin, rinse well with water. If breathed in, move person to fresh air.

Emergency spill information:

1-514-645-1320 or 1-800-463-7426.

For product information call: 1-800-387-3663

www.dulux.ca



PPG Architectural Coatings Canada, Inc.
2505, de la Metropole
Longueuil QC, Canada, J4G 1E5

The *PPG Logo* is a registered trademark of PPG Industries Ohio, Inc., *Dulux* is a registered trademark of AkzoNobel and is licensed to PPG Architectural Coatings Canada, Inc. for use in Canada only. *Glidden*, the *Glidden Logo*, the *Multi-Coloured Swatches Design* are registered trademarks of PPG Architectural Finishes, Inc. MPI is a trademark of Master Painters Institute, Inc.