


# Glidden® ULTRA INTERIOR LATEX PAINT 94900

Water based product, Eggshell Finish

## Technical Data Sheet

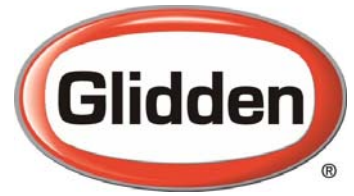

### Technical Specifications (21°C (70°F))

Solids by Volume:	34% (± 1%)
Solids by Weight:	51% (± 1%)

#### Volatile Organic Compounds (VOCs)\*

According to ASTM D3960-05:	< 100 g/L
Canadian regulation:	< 150 g/L

#### Available Colours

94900	White
94906	Ultra Deep Base*
94907	White Base*
94908	Medium Base*

*\*Must be tinted before use.*

Gloss Level	Eggshell finish
• Gloss @ 60°:	Not available
• Sheen @ 85°:	15 – 25%

#### Practical Coverage

35 - 39 sq. metres (380 - 420 sq. ft.) per 3.78 litres  
9 - 10 sq. metres per litre

*Coverage figures do not include loss due to surface irregularities and porosity or material losses due to application method or mixing.*

#### Resin Type

- Vinyl Acrylic

#### Viscosity\* Ready to use (96 - 104 Krebs Units)

*Manufacturing specification, working viscosity may vary*

Flammability	Non Flammable
Flash Point*	Not applicable

#### Film Thickness requirements\*

• Wet:	97 to 107 µm 3.8 to 4.2 mils
• Dry:	34 to 37 µm 1.3 to 1.5 mil

#### Drying Time\* @ 77°F/25°C - 50% Relative Humidity

Touch dry:	30 minutes
To recoat:	4 hours
Before cleaning:	14 days

When relative humidity is higher than 50%, double the required time.

*Drying times listed may vary depending on temperature, humidity, film build, colour, and air movement.*

\*Technical Data Source: 94900

### Product Description

Glidden Ultra Eggshell 94900 is a professional quality paint formulated to meet the requirements of the construction painter.

### Advantages

- Excellent touch up
- High Hiding
- Minimal spattering

### Intended Uses

- New and maintenance work.
- Residential and Commercial sites.
- Walls, ceilings and other surfaces where a low-lustre finish is required.

### Surfaces

- Properly primed surfaces: gypsum boards, drywall joint compound, plaster, fibre boards, concrete, stucco, masonry and wood.
- Surfaces in good condition previously painted with a water based product and properly prepared.

### Limitations Of Use

- Not formulated to be used on floors.
- Not formulated to be used over aged alkyd finishes.
- Some colours, or drastic colour changes, may require additional coats of paint.

### Certifications

- MPI – Category #44, Interior Latex Eggshell (MPI Gloss Level 2)
- Complies with LEED® Canada - CI (2006) and NC & CS (2009)

PPG Architectural Coatings Canada, Inc. warrants performance of its products to its intended use if properly applied in accordance with the label directions and the specifications of the technical data sheet. Having no control over the application methods and conditions or the circumstances related to its use, no other warranty, expressed or implied, statutory or otherwise is given. This limited warranty extends only to the original purchaser of the product and is not transferable or assignable. If the product fails to conform to this limited warranty, we will, at your option, furnish replacement product or refund the purchase price. This limited warranty excludes (1) labour or costs of labour for the application or removal of any product and (2) all other direct, indirect, incidental, special or consequential damages.



Available at Dulux Paints Stores across Canada and Bétonel-Dulux Stores in Quebec

06/2018

## SURFACE PREPARATION

Surfaces must be clean and dry. Remove loose and peeling paint, dirt, dust, mildew, oil, wax and other surface contamination.

**Unpainted Plaster, Drywall, Concrete, Stucco or Masonry:** New surfaces must age at least 30 days and be thoroughly dry before painting. Remove surface dust and prime entire surface with Latex Primer.

**Painted surfaces:** Strip, scrape or remove all loose and peeling paint, and sand to smooth edges. Sand to smooth edges.

Eliminate stains caused by mildew with a solution of household bleach (1 part household bleach to 3 parts of water). Wear rubber gloves and eye protection. Rinse thoroughly with clear water and let dry completely.

Remove all surface contaminants by washing with an appropriate cleaner. Rinse thoroughly with water and allow to dry.

Sand rough areas and dull glossy surfaces or alkyd painted surfaces to ensure adhesion. Clean up carefully sanding residue.

Repair damaged areas and spot prime or prime total surface, where necessary. Touch up bare spots.

**Wood:** Unpainted wood or wood in poor condition should be sanded smooth and clean up carefully to remove dust. If wood exudes resin, scrape the excess and clean surface with alcohol or paint thinner prior to seal knots and sap streaks with shellac.

Repair holes and cracks with joint compound suitable for the surface to be repaired.

Before its application, cover or mask surfaces that are not to be painted.

Prime entire surface with the appropriate primer.

**PRECAUTION:** Dry sanding will give rise to dust and/or hazardous fumes. Wear suitable respiratory protective equipment. WARNING! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. Contact a regional Health Canada office for more information.

## Application

This is a ready-to-use product, do not thin.

Shake well before and frequently during use.

Keep containers closed when not in use.

Apply using brushes, rollers or airless spray equipment.

## Application Conditions

Apply with good ventilation only when air and surface temperatures are between 10°C (50°F) and 32°C (90°F).

## Tools

- Brush: synthetic bristles (nylon, polyester)
- Roller: Lint free – 10 - 15 mm
- Spray (Airless equipment)\*: tip size: 0.015 to 0.021 in.  
Pressure: 1500 – 2000 psi

\*Spray recommendations may vary from figures listed depending on equipment manufacturer.

*Spray equipment must be handled with due care and in accordance with the manufacturer's recommendation. High-pressure injection of coatings into the skin by airless equipment may cause serious injury.*

## SYSTEM RECOMMENDATIONS

*Two topcoats are recommended on all surfaces for better durability and appearance.*

**Previously painted surfaces in good condition:**

### Latex paints

- No primer required
- Glidden Ultra 94900

### Repaired surfaces

- Glidden Ultra 36600- one coat (bare areas or total surface)
- Glidden Ultra 94900

### Alkyd paints

- Dulux Gripper 60000 – one coat over total surface
- Glidden Ultra 94900

### **New surfaces:**

**Gypsum drywall, hardened and dry drywall compound, new dry plaster, concrete, stucco or masonry:**

- Glidden Ultra 36600- one coat (bare areas or total surface)
- Glidden Ultra 94900

### Wood:

- Dulux Gripper 60000 – one coat over total surface
- Glidden Ultra 94900

### **Vivid, brilliant and deep colours:**

- Ultra Latex Accent Basecoat Glidden Ultra 96310 – one coat over total surface.
- Glidden Ultra 94900 – additional coat may be required

## Cleanup

Remove as much product quantity as possible and clean hands and tools immediately with warm, soapy water. Clean spills right away with a damp cloth.

## Storage and Transportation

Keep product cool and dry. DO NOT FREEZE

## Disposal

Consult your municipality in order to dispose of paint residues according to environmental regulations. Do not pour down a drain or storm sewer.

## Safety Measures

Before use, be sure to read and follow the instructions and warnings on the label and Safety Data Sheet (SDS). For workplace use, an SDS are available from your retailer, through our website or by calling 1-800-463-7426. Keep out of the reach of children. Use only in well-ventilated area. Keep containers tightly closed and sealed until ready for use. Use personal protective equipment as required. Avoid contact with eyes or skin. Avoid breathing spray mists.

**MAY BE HARMFUL IF SWALLOWED. MAY CAUSE EYE AND SKIN IRRITATION.**

**FIRST AID TREATMENT:** If swallowed, call a Poison Control Centre or doctor immediately. If in eyes or on skin, rinse well with water. If breathed in, move person to fresh air.

Emergency spill information:

1-514-645-1320 or 1-800-463-7426.

For product information call: 1-800-387-3663  
www.dulux.ca



PPG Architectural Coatings Canada, Inc.  
2505, de la Metropole  
Longueuil QC, Canada, J4G 1E5

The PPG Logo is a registered trademark of PPG Industries Ohio, Inc., Dulux is a registered trademark of AkzoNobel and is licensed to PPG Architectural Coatings Canada, Inc. for use in Canada only. Glidden, the Glidden Logo, the Multi-Coloured Swatches Design are registered trademarks of PPG Architectural Finishes, Inc. MPI is a trademark of Master Painters Institute, Inc.