

# TURBO VISION®



## Technical Data Sheet

### V1000V

August 2020

INTERNATIONAL MASTER  
FOR PROFESSIONAL USE ONLY

### TURBO VISION® 2-pack Premium High Flow EHS Topcoat

Product	Description
P650-1000	Premium EHS High Flow Binder
P600-9xxx	Coloured Tinters
P210-7644	EHS Hardener - Standard
P210-7642	EHS Hardener - Slow
P852-6440	EHS Thinner - Extra Slow
P852-6442	EHS Thinner - Slow
P852-6444	EHS Thinner - Medium
P852-6446	EHS Thinner - Fast
P852-6448	EHS Thinner - Extra Fast

### Product Description


*Turbo Vision* Premium High Flow 2-pack EHS Topcoat has been optimised for Commercial Transportation Vehicles for both builders and repairers.

*Turbo Vision* Premium High Flow EHS Topcoat is an easy to spray topcoat providing high opacity, outstanding gloss and general appearance with long term durability, which fully meets the highest standards demanded by fleet market.

Thanks to the selection of its ancillaries, *Turbo Vision* Premium High Flow EHS Topcoat:

- can be used from small to large area in a wide range of temperature conditions
- can be baked at low temperature or left airdry

**THESE PRODUCTS ARE FOR PROFESSIONAL USE ONLY.**

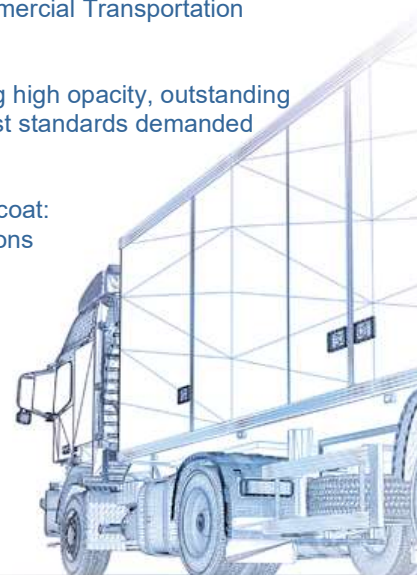


# TURBO VISION®



## Substrates and Preparation

### Prepare the Substrate as follows:

#### Substrates:



- Original finishes and work in sound condition need to be degreased, cleaned and dry sanded with P320-P400 or (P600 wet) prior to topcoat application.

- Steel, Aluminum, GRP & Zinc coated steel need to be pre-primed with the appropriate primer in order to ensure correct intercoat adhesion and substrate protection.

- TURBO VISION® Premium High Flow EHS Topcoat is suitable over all Nexa Autocolor primers, surfacers and sealers.

### Cleaning:




The substrate to be painted must be dry, clean, free of corrosion, grease & mould release agents.

Substrates need to be thoroughly wiped using the appropriate degreaser (P850-1367 Degreaser & P850-1378 Spirit Wipe or P980-9010 low V.O.C cleaner)


## Process

### Conventional, Pressure Pot or Air Assisted Airless Application




#### Mixing Ratio by Volume:

<i>Turbo Vision</i> Premium High Flow EHS Topcoat	2
P210-764x hardener (*)	1
P852-644x thinner (**)	0,8-1,2









Temperature	<15°C	15°C	15-20°C	20-25°C	20-30°C	25-35°C	>30°C
Combination	Extra Fast	Fast	Standard/Fast	Standard/Slow	Slow/Medium	Slow	Very Slow
Job size	Very small/spot	small	small	medium to large	medium to large	medium to large	large
Hardener (*)	P210-7644						
Thinner (**)	P852-6448	P852-6446	P852-6444	P852-6442	P852-6444	P852-6442	P852-6440
Potlife	<30 min	1 hour	> 2 hours	> 2 hours	> 2 hours	> 2 hours	> 2 hours
Airdry schedule	<1 hour	2 hours	2-3 hours	3 hours	overnight	overnight	overnight
Baking schedule	Airdry	20 min @50°C	30 min @50°C	30 min @50°C	30 min @60°C	30 min @60°C	30 min @60°C

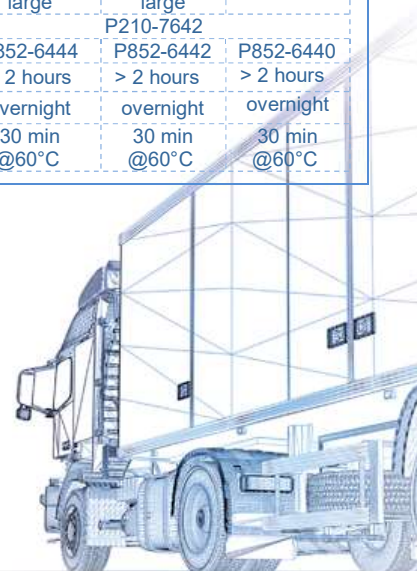**THESE PRODUCTS ARE FOR PROFESSIONAL USE ONLY.**




# TURBO VISION<sup>®</sup>



Process										
<b>Conventional, Pressure Pot or Air Assisted Airless Application</b>										
	Spray Viscosity at 20°C: 18-22 seconds DIN4									
	1,3-1,5 mm Gravity or suction feed at 2.0-2,4 bars									
	OR 0,8-1mm Pressure Pot Air Cap Pressure: 0.68 bar Paint Pressure : 0.3-1.0 bar Fluid flow rate: 280-320 cc/min									
	OR Tip Size: 9 to 11 Thou (0,23 to 0,28 mm) for Air Assisted Airless Paint Pressure: 90-110 bars Air Atomization: 2,5-3 bars									
	<b>Number of Coats</b>									
	<table border="0"> <tr> <td style="text-align: center;"><u>1 Visit:</u></td> <td style="text-align: center;"><u>2 coats:</u></td> </tr> <tr> <td style="text-align: center;">1 light coat + 1 Full coat</td> <td style="text-align: center;">1 Medium closed + 1 Full coat</td> </tr> </table>	<u>1 Visit:</u>	<u>2 coats:</u>	1 light coat + 1 Full coat	1 Medium closed + 1 Full coat					
<u>1 Visit:</u>	<u>2 coats:</u>									
1 light coat + 1 Full coat	1 Medium closed + 1 Full coat									
Dry Film Thickness:	<table border="0"> <tr> <td style="text-align: center;">50 – 60 µm</td> <td style="text-align: center;">50 – 70 µm</td> </tr> </table>	50 – 60 µm	50 – 70 µm							
50 – 60 µm	50 – 70 µm									
	<table border="0"> <tr> <td></td> <td style="text-align: center;"><u>1 Visit:</u></td> <td style="text-align: center;"><u>2 coats:</u></td> </tr> <tr> <td style="text-align: center;">Flash-Off between coats:</td> <td style="text-align: center;">2-3 minutes</td> <td style="text-align: center;">10 minutes</td> </tr> <tr> <td style="text-align: center;">Flash-Off before bake:</td> <td style="text-align: center;">10 minutes</td> <td style="text-align: center;">10 minutes</td> </tr> </table>		<u>1 Visit:</u>	<u>2 coats:</u>	Flash-Off between coats:	2-3 minutes	10 minutes	Flash-Off before bake:	10 minutes	10 minutes
	<u>1 Visit:</u>	<u>2 coats:</u>								
Flash-Off between coats:	2-3 minutes	10 minutes								
Flash-Off before bake:	10 minutes	10 minutes								

**THESE PRODUCTS ARE FOR PROFESSIONAL USE ONLY.**

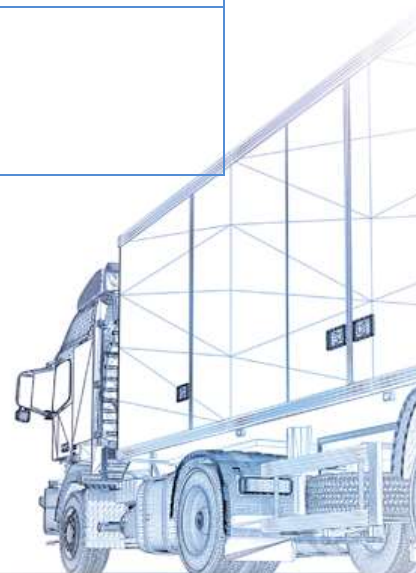

# TURBO VISION®



## Colour

### COLOUR MIXING

All Tinters should be thoroughly hand stirred when first opened, and then stirred on a mixing machine for 10 minutes before use. Thereafter all tinters should be machine stirred twice a day for at least 10 minutes.

### COLOUR CHECKING

As with all refinish paint systems, a colour check should be carried out before painting the vehicle.

## General Process Notes

### RECOAT

TURBO VISION® Premium High Flow EHS Topcoat can be recoated by itself within 24 hours without sanding.

### DECAL APPLICATION

It is recommended that TURBO VISION® Premium High Flow EHS Topcoat is allowed to cure for at least one week prior to any decal application.


### COVERAGE

Approximately 12 to 13 m<sup>2</sup> per litre of ready for use paint at a dry film thickness of 50 microns depending on thinning ratio used.

### OTHER POINTS TO NOTE

Allow finishes to harden thoroughly before subjecting to vehicle washes. This can take a number of weeks if vehicles are air-dried in cold conditions and/or paint film thickness is excessively high.

**THESE PRODUCTS ARE FOR PROFESSIONAL USE ONLY.**

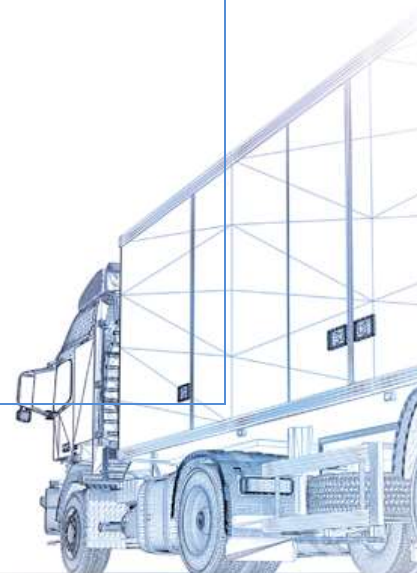

# TURBO VISION<sup>®</sup>



## STORAGE

### Mixing Room Temperature:

Store P600-xxxx Tinters in the Mixing Room between the following temperatures: 18 to 25°C.

### Storage Temperature:

Store P600-xxxx Tinters between the following temperatures: 5 to 35°C (41 to 95°F).

Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials and food and drink. Keep container tightly closed and sealed until ready for use.

Containers that have been opened must be carefully resealed and kept upright to prevent leakage.

Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination.

Always refer to the material Safety Data Sheet.

## VOC INFORMATION

The EU limit value for this product (product category: IIB.d) in ready to use form is max. 420g/litre of VOC. The VOC content of this product in ready to use form is max. 420g/litre. Depending on the chosen mode of use, the actual ready to use VOC of this product may be lower than that specified by the EU Directive code.

**These products are for professional use only**, and are not to be used for purposes other than those specified. The information on this TDS is based on present scientific and technical knowledge, and it is the responsibility of the user to take all necessary steps in order to ensure the suitability of the product for the intended purpose. For Health and Safety information please refer to the material Safety Data Sheet, also available at: [http://www.ppg.com/Autocolor\\_MSDS](http://www.ppg.com/Autocolor_MSDS)

### For further information please contact:

Customer Service Sales Group  
PPG Industries (UK) Ltd  
Needham Road  
Stowmarket  
Suffolk IP14 2AD

**Tel: 01449 771771**

**Fax: 01449 773472**

**THESE PRODUCTS ARE FOR PROFESSIONAL USE ONLY.**

