



ALL PURPOSE

Adhesive Caulk
plus SILICONE

AC-138

Interior & Exterior

High performance vinyl acrylic adhesive caulk plus silicone that bonds and seals

PRODUCT DESCRIPTION

LIQUID NAILS® All-Purpose Adhesive Caulk, AC-138, is specially formulated to bond like an adhesive and seal like a caulk. This high performance acrylic adhesive caulk also has silicone added for excellent adhesion and flexibility. Resists dirt and dust. Stays white and can be painted.

RECOMMENDED FOR

Sealing:

- Tubs
- Showers
- Wood
- Countertops
- Ceiling/wall joints
- Sinks
- Bathroom fixtures
- Vanities
- Siding & trim
- Vents/ducts
- Corner joints
- Baseboards
- Window/door frames
- Utility outlets
- Moldings

AC-138 is also recommended for bonding:

- Ceramic tiles
- Corkboard
- Backsplashes
- Aluminum
- Moldings
- Metal/wood trim
- Concrete/masonry/brick
- Plastic
- Vinyl cove base
- Plaster/drywall
- Wood
- Fiberglass/glass


NOT RECOMMENDED FOR

Use below the water-line, automotive uses, on aquariums, on top of silicone, wet or green wood. Excessive joint movement might be experienced as wet or green wood dries.

PRODUCT ADVANTAGES

- Bonds and seals all surfaces
- Paintable
- Excellent adhesion & flexibility
- Gives mildew resistant seal
- Paintable
- Water clean up
- Resists dirt & dust
- Stays bright white

Please research all installation instructions and read entire label and Material Safety Data Sheet for safety, health & environmental information prior to use. See other cautions on last page.

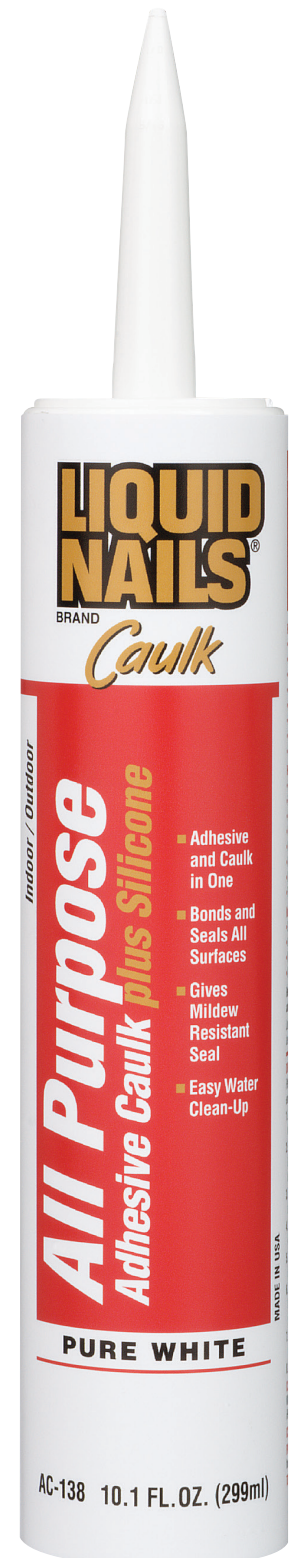



ALL PURPOSE

Adhesive Caulk
plus SILICONE

SURFACE PREPARATION

Clean and dry surface thoroughly before applying this product. Remove any old caulk or loose or peeling paint. This product fills gaps up to 1/4". Fill any deep joints with backer rod to within 1/2" of surface. AC-138 should be applied in dry weather at temperatures above 40°F (4°C). Do not caulk outdoors with this product when rain is expected within 24 hours. **Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead.** Exposure to lead dust or fumes may cause adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For additional information, contact the USEPA/Lead Information Hotline at 1-800-424-LEAD.

APPLYING THE PRODUCT

Load AC-138 cartridge into standard caulking gun. Cut nozzle at 45° angle for desired bead size (marked on nozzle). Apply continuous bead into gap, using uniform pressure to fill completely. Smooth over with wet gloved finger or tool. Caulk skins over within 10 minutes and should be level with the surface. If used as an adhesive, complete assembly within 10 minutes.

Painting Guidelines: Paintable with oil or latex paint in two hours. For best results wait 24 hours, longer under humid conditions.

CLEAN UP

Use water or mineral spirits when wet. For dry material, scrape and then wipe with mineral spirits.

DISPOSAL

Place **empty** containers in normal refuse for disposal. Remove residual product from the container, allow product to dry, and dispose of in conjunction with normal household waste. Contact your sanitation department or household hazardous waste coordinator for information concerning possible re-use of unused caulks and sealants.

EAD-C8

LIMITED WARRANTY

PPG warrants satisfaction with this product when handled and applied according to label instructions. If product is not as warranted, PPG will, at your option, furnish replacement product or refund the purchase price. Please call 1-800-634-0015 for details. This limited warranty excludes labor or the cost of labor and is given as the exclusive warranty and remedy. **No warranty of merchantability, fitness for purpose or other warranty, express or implied, is made. PPG shall not be liable for any special, incidental or consequential damages.** Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusions/limitations may not apply. This limited warranty gives specific legal rights; you may have other rights that vary by state.

WARNING! CAUSES EYE, SKIN AND RESPIRATORY TRACT IRRITATION. MAY BE HARMFUL IF SWALLOWED. USE ONLY WITH ADEQUATE VENTILATION. KEEP OUT OF THE REACH OF CHILDREN.

NOTICE: Contains Crystalline Silica. If sanding, wear a dust mask to avoid breathing of sanding dust. Avoid contact with eyes and skin. **FIRST AID:** For skin contact, wash thoroughly with soap and water. If any product remains, gently rub with petroleum jelly, vegetable or mineral/baby oil, then wash again with soap and water. Repeated applications may be needed. Remove contaminated clothing. For eye contact, flush **immediately** with plenty of water for at least 15 minutes. **Obtain emergency medical treatment.** If swallowed, **obtain medical treatment immediately.** If inhalation causes physical discomfort, remove to fresh air. If discomfort persists or any breathing difficulty occurs, **get medical help.** For emergency information, customer service, MSDS or additional safety and chronic hazard information, call 1-800-634-0015. **KEEP FROM FREEZING.**

AC-138 White TECHNICAL INFORMATION

Base: Acrylic blend
Type: Water borne
Color: Bright white
Appearance: Smooth Paste
Application Temperature: 40–100° F
(4–38° C)
Service Temperature: -20–200° F
(-29–93° C)
Adhesion: Good to most common building substrates
Extrudability: Excellent
Shear Strength: 24 hours – 300 psi
7 days – 380 psi
Consistency: Smooth paste
Durability: Excellent
Flexibility: Good to -10° F (-23° C)
Volume Shrinkage: 40%
Slump: Max 0.15"
Shore "A" Hardness: 60
Water Resistance: Good
Freeze-Thaw Stable: Passes 5 cycles
Bleed: None
Staining: None
Odor: Mild Acrylic
Ageing: Will not become brittle
Tack Free Time: Tack at drying time – none
Tack at 24 hours – none
Drying Time: Sets in 24 hours. Allow 5 days to completely dry
Weight Per Gallon: 12.5 pounds (5.54 kg)
Viscosity: 350,000 to 400,000 CPS
Solids: 75%
Flammability: Nonflammable
Flash Point: Greater than 200°F (93°C)
Coverage: 30 lineal ft. (9.14 lineal meters) using 1/4" (.64cm) bead
Shelf Life: One year from date of purchase
VOC: < 1.5% by wt.